

KOMATSU

PC17R-5 PC20R-5



Mini-excavator

Engine power
11.8 kW / 15.8 HP @ 2600 rpm

Operating weight
PC17R-5: 1755 - 1835 kg
PC20R-5: 1985 - 2040 kg

Bucket capacity
PC17R-5: 0.022 - 0.028 m³
PC20R-5: 0.020 - 0.030 m³

High versatility, low fuel consumption and
safe performance in tight spaces



Engine power

11.8 kW / 15.8 HP @ 2600 rpm

Operating weight

PC17R-5: 1755 - 1835 kg

PC20R-5: 1985 - 2040 kg

Transport weight

PC17R-5: 1670 kg

PC20R-5: 1890 kg

Bucket capacity

PC17R-5: 0.022 - 0.028 m³

PC20R-5: 0.020 - 0.030 m³





Powerful and environmentally friendly

- Newly developed for the EU market
- Low-consumption EU Stage V engine
- Highest stability and lifting capacity thanks to new body and counterweight design
- Increased working capacity due to top-mounted boom cylinder (PC20R-5)

First-class comfort

- Newly designed cab
- Grammer adjustable suspension seat (option)
- Improved operator convenience
- Low vibration levels with short pitch rubber shoes

Safety first

- Dual lock system for PPC controls
- Secondary engine shutdown switch
- Seat belt caution indicator
- Lifting eyes on cabin roof and tie down points on upper structure
- LED working lights (option)

Total versatility

- Designed for easy transportation on 2.5 tonnes GVW trailer (PC17R-5)
- Lehnhoff Powertilt available as factory fit (PC20R-5)
- 3rd auxiliary circuit for hydraulic powertilt and 4th line for hydraulic quick-coupler single effect (PC20R-5) (option)
- Hydraulic quick coupler line (PC20R-5) (option)
- Proportional control for attachments (option)
- Variable gauge undercarriage as standard

Easy maintenance

- Improved filtration
- Easy maintenance access direct from ground level
- Fully opening engine door and side cover

Komtrax (option)

- Komatsu Wireless Monitoring System
- 4G mobile communications
- Increased operational data and reports

Powerful and environmentally friendly



Komatsu EU Stage V

The Komatsu EU Stage V engine is productive, dependable and efficient. With ultra-low emissions, it provides a lower environmental impact and a superior performance to help reduce operating costs and lets the operator work in complete peace of mind.

Komatsu CLSS

The CLSS (Closed-centre Load Sensing System) hydraulic circuit guarantees power, speed and perfect control to all movements, including simultaneous ones. The combination of the variable displacement pump and of CLSS allows operators to perform all required movements with maximum efficiency, regardless of the load or rpm.

Highest stability and digging force

The conventional tail concept delivers highest stability and lifting capacity for both models. In addition, on the PC20R-5 the boom cylinder is mounted top side and the orientation is reversed. This further improves the digging force, and eliminates risk of cylinder rod damage when loading.

Total versatility



Tie down points on upper structure help to quickly secure the machine for transport



Fast and simple lifting using ropes only, without any additional tools required



Perfect control even during combined operations

Easy to transport

The PC17R-5 has been developed specifically to combine high performance with very easy transportation. Thanks to its convenient weight, it can be moved together with two standard-sized buckets on a small 2.5 tonnes trailer, with a simple car driver's licence. No truck is required to easily transport the machine to a jobsite, and back to the yard.



Foldable blade to match the variable undercarriage gauge



Power tilt option (PC20R-5)

Lehnhoff Powertilt is available as factory fit. It combines all benefits of a quick-coupler with a tilt motor, offering a huge work range of 2x 90° swivel range on both sides. Additional auxiliary lines allow the utilisation of complex attachments such as rotating grapples. Piping is routed over the arm for better protection and long lasting design. While Lehnhoff Powertilt is perfect for very precise bucket movements, it's also well suitable for breaker applications.

First-class comfort



An optimal work environment

Developed with an exceptional care to details, Komatsu's new high comfort spacious cab offers a quiet and comfortable work environment. Special attention was given to the operator, with unrivalled foot space in this class, ergonomic and dedicated PPC controls, and an efficient ventilation system. The wide cab door and conveniently located hand grips make access safe and easy.

Perfect operator convenience

A 1/2 way auxiliary hydraulic circuit allows the usage of multiple working tools, such as a hammer, a clamshell bucket, an auger, etc. Proportional controls are available, in option, for the safe and precise operation of attachments. The automatic travel speed shift function allows smooth and efficient operation. You can choose auto 2-speed or fixed 1st speed travel for easy shifting during blade operation by pressing the speed selector button on the blade lever. A 12 Volt power port is also included in the cab.



Information & communication technology



Knowledge

You get quick answers to basic and critical questions about your machines – what they're doing, when they did it, where they're located, how they can be used more efficiently and when they need to be serviced. Performance data is relayed by wireless communication technology (satellite, GPRS or 4G depending on model) from the machine to a computer and to the local Komatsu distributor – who's readily available for expert analysis and feedback.

Convenience

Komtrax enables convenient fleet management on the web, wherever you are. Data is analysed and packaged specifically for effortless and intuitive viewing in maps, lists, graphs and charts. You can foresee eventual maintenance issues and required spare parts, and troubleshoot a problem before Komatsu technicians arrive on site.



The way to higher productivity

Komtrax uses the latest wireless monitoring technology. Compatible on PC, smartphone or tablet, it delivers insightful and cost saving information about your fleet and equipment, and offers a wealth of information to facilitate peak machine performance. By creating a tightly integrated web of support it allows proactive and preventive maintenance and helps to efficiently run a business.

Power

The detailed information that Komtrax puts at your fingertips 24 hours a day, 7 days a week gives the power to make better daily and long-term strategic decisions – at no extra cost. Problems can be anticipated, maintenance schedules customised, downtime minimised and machines kept where they belong: working on the jobsite.



Easy maintenance



Excellent serviceability

Just open two doors for a quick access to daily inspection points and the side-by-side coolers. For major service tasks, the cab floor cover is easily removable, offering convenient access directly from ground level. The fuel filler is located low for refueling in a safe and easy-to-reach position. A large fuel filter and fuel pre-filter with water separator protect the engine. High durability bushings and a 500 hours engine oil change interval further lower operating costs.



Highest reliability and safety

Optimal jobsite safety

For increased jobsite safety, the PC17/20R-5 includes a dual lock lever neutral detection system for travel and work equipment levers, along with a seat belt caution indicator and a secondary engine shutdown switch.

Variable undercarriage

For applications requiring maximum versatility in terms of size and stability, the PC17/20R-5 offers hydraulic undercarriage extension, which is operated from the operator's seat via a push button and the blade control lever.

This feature allows the operator to quickly switch from maximum stability for working to a reduced width of less than one metre for driving through narrow passages or doors.



Secondary engine shutdown switch



Seat belt caution indicator on the dashboard



Large glass surfaces provide an excellent all-round view on the job site

Specifications

Engine

| | |
|-----------------------------|---|
| Model | Komatsu 3D67E-2 |
| Type | Swirl chamber |
| Engine power | |
| at rated engine speed | 2600 rpm |
| ISO 14396 | 11.8 kW / 15.8 HP |
| ISO 9249 (net engine power) | 1.4 kW / 15.3 HP |
| No. of cylinders | 3 |
| Bore × stroke | 67 × 74 mm |
| Displacement | 778 cm ³ |
| Max. torque / engine speed | 44.1 Nm / 1800 rpm |
| Cooling system | Water |
| Air filter type | Dry |
| Starter motor | Electric motor with pre-heating air system for cold climate |
| Fuel | Diesel fuel, conforming to EN590 Class 2/Grade D. Paraffinic fuel capability (HVO, GTL, BTL), conforming to EN 15940:2016 |

Drives and brakes

| | |
|------------------------------|--|
| Type | 2 levers with pedals giving full independent control of each track |
| Drive method | Hydrostatic |
| Hydraulic motors | 2 × axial piston |
| Reduction system | Planetary gear |
| Max. travel speeds (Lo / Hi) | 2.2 - 4.2 km/h |
| Maximum drawbar pull | |
| PC17R-5 | 12.9 kN (1316 kgf) |
| PC20R-5 | 14.9 kN (1520 kgf) |

Undercarriage

| | |
|----------------------------|--|
| Construction | Variable gauge with centre sliding section |
| Track rollers (each side) | 3 |
| Shoe width | 230 mm |
| Ground pressure (standard) | |
| PC17R-5 | 0.316 kg/cm ² |
| PC20R-5 | 0.34 kg/cm ² |

Hydraulic system

| | |
|---|---|
| Type | Komatsu CLSS |
| Main pumps | 1 × variable displacement pump 1 × gear pump |
| Max. pump flow | 36 l/min |
| Max. operating pressure | |
| PC17R-5 | 18.5 MPa (185 bar) |
| PC20R-5 | 21.0 MPa (210 bar) |
| Hydraulic motors | |
| Travel | 2 × variable displacement motor |
| Swing | 1 × fixed displacement motor |
| Hydraulic cylinders (bore × stroke) PC17R-5 | |
| Boom | 65 × 365 mm |
| Arm | 50 × 453 mm |
| Bucket | 50 × 378 mm |
| Boom swing | 60 × 310 mm |
| Blade | 65 × 100 mm |
| Hydraulic cylinders (bore × stroke) PC20R-5 | |
| Boom | 65 × 475 mm |
| Arm | 55 × 447 mm |
| Bucket | 50 × 378 mm |
| Boom swing | 60 × 292 mm |
| Blade | 65 × 100 mm |
| Bucket digging force (ISO 6015) | |
| PC17R-5 | 9.0 kN (920 kgf) |
| PC20R-5 | 9.9 kN (1010 kgf) |
| Arm crowd force (ISO 6015) PC17R-5 | |
| 880 mm arm | 7.3 kN (750 kgf) |
| Arm crowd force (ISO 6015) PC20R-5 | |
| 1215 mm arm | 6.3 kN (654 kgf) |

Service refill capacities

| | |
|------------------|--------|
| Fuel tank | 19 l |
| Cooling system | 4.2 l |
| Engine oil | 3.6 l |
| Hydraulic system | 23.8 l |

Blade

| Type | Central welded steel structure with extendable side sections |
|----------------------------|--|
| PC17R-5 | |
| Width × height | 1280 (990) × 240 mm |
| Blade, max. lifting height | 180 mm |
| Blade, max. digging depth | 225 mm |
| PC20R-5 | |
| Width × height | 1280 (990) × 250 mm |
| Blade, max. lifting height | 230 mm |
| Blade, max. digging depth | 300 mm |

Swing system

The rotation is operated by means of an orbital hydraulic motor. Single ball-bearing ring with internal, induction hardened tooth ring. Centralised lubrication of the unit.

| | |
|-------------|---------|
| Swing speed | 9.0 rpm |
|-------------|---------|

Machine dimensions

| | | PC17R-5 | PC20R-5 |
|----------------------|----|---------|---------|
| A Overall length | mm | 3800 | 3845 |
| B Overall height | mm | 2370 | 2370 |
| C Track length | mm | 1450 | 1570 |
| D Track gauge (min) | mm | 990 | 990 |
| E Track gauge (max) | mm | 1280 | 1280 |
| F Shoe width | mm | 230 | 230 |
| G Tail swing radius | mm | 1120 | 1120 |
| H/I Boom swing angle | ° | 74 / 45 | 74 / 45 |
| J Boom offset LH | mm | 310 | 310 |
| K Boom offset RH | mm | 560 | 560 |


Operating weight (appr.)

| | PC17R-5 | PC20R-5 |
|--------------|---------|---------|
| Rubber shoes | 1755 kg | 1985 kg |
| Steel shoes | 1835 kg | 2040 kg |


Operating weight, including cab, standard bucket, operator, liquids, filled tank and standard equipment (ISO 6016).

Environment

| | |
|------------------|---|
| Engine emissions | Fully complies with EU Stage V exhaust emission regulations |
| Noise levels | |
| LwA external | 93 dB(A) (2000/14/EC Stage II) |
| LpA operator ear | 78 dB(A) (ISO 6396 dynamic test) |

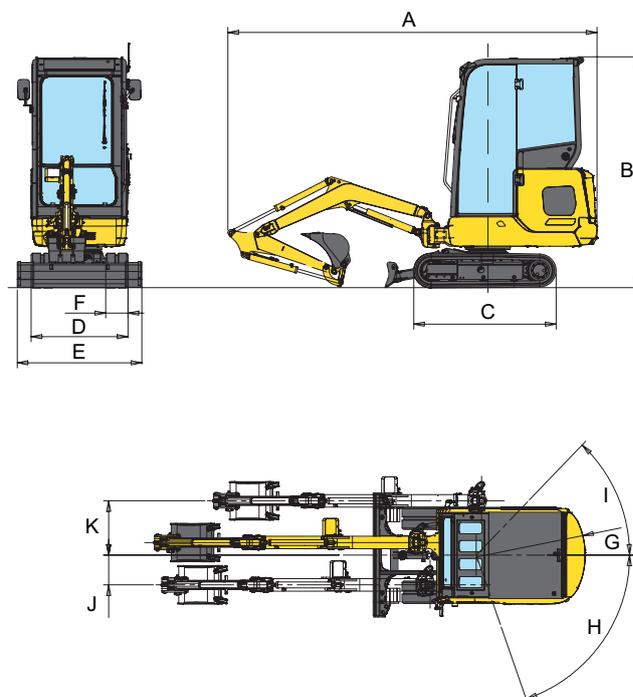

Working range

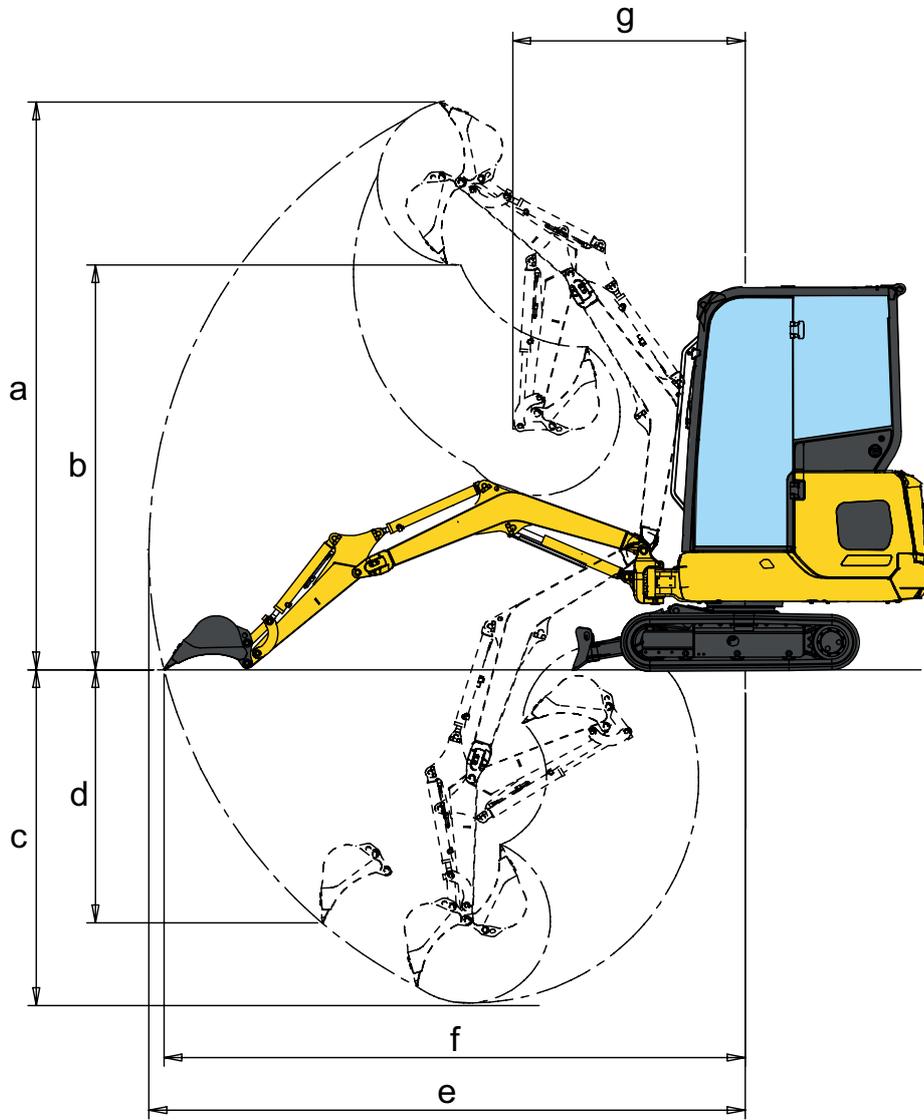

Working range

| | | PC17R-5 | | PC20R-5 | |
|--------------------------------------|----|---------|------|---------|------|
| Arm length | mm | 880 | 1130 | 965 | 1215 |
| a Max. digging height | mm | 3370 | 3670 | 3570 | 3800 |
| b Max. dumping height | mm | 2450 | 2660 | 2560 | 2760 |
| c Max. digging depth | mm | 2000 | 2200 | 2100 | 2370 |
| d Max. vertical wall digging depth | mm | 1500 | 1740 | 1685 | 1980 |
| e Max. digging reach | mm | 3630 | 3890 | 3830 | 4100 |
| f Max. digging reach at ground level | mm | 3540 | 3800 | 3760 | 4030 |
| g Min. swing radius | mm | 1425 | 1560 | 1415 | 1515 |

Lifting capacity

A Reach from swing centre

B Bucket hook height

Lifting capacities, including bucket, bucket linkage and bucket cylinder

 Rating over front

 Rating over side

PC17R-5 over front, blade up

| Arm length | A | 1.0 m | 2.0 m | 3.0 m | Max. |
|------------|-----------|---|---|---|---|
| | B |  |  |  |  |
| 880 mm | 2.0 m kg | | 275 | | 260 |
| | 1.0 m kg | | 440 | 275 | 265 |
| | 0.0 m kg | | 520 | 285 | 285 |
| | -1.0 m kg | 905 | 405 | | 295 |
| 1130 mm | 0.0 m kg | | 510 | 280 | 255 |

PC17R-5 over front, blade down

| Arm length | A | 1.0 m | 2.0 m | 3.0 m | Max. |
|------------|-----------|---|---|---|---|
| | B |  |  |  |  |
| 880 mm | 2.0 m kg | | 275 | | 260 |
| | 1.0 m kg | | 440 | 275 | 265 |
| | 0.0 m kg | | 525 | 285 | 285 |
| | -1.0 m kg | 905 | 405 | | 295 |
| 1130 mm | 0.0 m kg | | 510 | 280 | 255 |

PC20R-5 over front, blade up

| Arm length | A | 1.0 m | 2.0 m | 3.0 m | Max. |
|------------|-----------|---|---|---|---|
| | B |  |  |  |  |
| 965 mm | 3.0 m kg | | | | 330 |
| | 2.0 m kg | | 295 | | 335 |
| | 1.0 m kg | | 605 | 345 | 300 |
| | 0.0 m kg | | 610 | 320 | 280 |
| | -1.0 m kg | 1280 | 425 | | 250 |
| 1215 mm | 0.0 m kg | | 635 | 330 | 260 |

PC20R-5 over front, blade down

| Arm length | A | 1.0 m | 2.0 m | 3.0 m | Max. |
|------------|-----------|---|---|---|---|
| | B |  |  |  |  |
| 965 mm | 3.0 m kg | | | | 330 |
| | 2.0 m kg | | 295 | | 335 |
| | 1.0 m kg | | 605 | 345 | 300 |
| | 0.0 m kg | | 610 | 320 | 280 |
| | -1.0 m kg | 1280 | 425 | | 250 |
| 1215 mm | 0.0 m kg | | 635 | 330 | 260 |

PC20R-5 over front, blade up, Powertilt

| Arm length | A | 1.0 m | 2.0 m | 3.0 m | Max. |
|------------|-----------|---|---|---|---|
| | B |  |  |  |  |
| 965 mm | 3.0 m kg | | | | 270 |
| | 2.0 m kg | | 255 | | 285 |
| | 1.0 m kg | | 565 | 300 | 250 |
| | 0.0 m kg | | 565 | 275 | 230 |
| | -1.0 m kg | 1225 | 385 | | 205 |

PC20R-5 over front, blade down, Powertilt

| Arm length | A | 1.0 m | 2.0 m | 3.0 m | Max. |
|------------|-----------|---|---|---|---|
| | B |  |  |  |  |
| 965 mm | 3.0 m kg | | | | 270 |
| | 2.0 m kg | | 255 | | 285 |
| | 1.0 m kg | | 565 | 300 | 250 |
| | 0.0 m kg | | 565 | 275 | 230 |
| | -1.0 m kg | 1225 | 385 | | 205 |

Ratings are based on ISO standard 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Excavators used in object handling operations must comply with the related local regulations and must be equipped with hose burst valves (boom & arm) and an overload warning device in compliance with EN474-5.

- The values marked with an asterisk (*) are limited by the hydraulic capacities.
- Calculations are based on the machine resting on a uniform and firm surface.
- The lifting point is a hypothetical hook placed behind the bucket.

Standard and optional equipment

Engine

| | |
|------------------------------------|---|
| Komatsu 3D67E-2 diesel engine | ● |
| EU Stage V compliant | ● |
| Automatic two-speed travel control | ● |
| Alternator 12 V / 40 A | ● |
| Starter motor 12 V / 1.4 kW | ● |
| Batteries 12 V / 45 Ah | ● |

Hydraulic system

| | |
|--|---|
| Komatsu closed-centre load sensing (CLSS) hydraulic system | ● |
| PPC control lever and pedals for steering and travel | ● |
| Adjustable PPC wrist control levers for arm, boom, bucket and swing | ● |
| Hydraulic line for hammer and for 2-way equipment up to boom and arm (HCU-A) | ● |
| Proportional controls for attachment on joystick | ○ |
| Hydraulic quick-coupler line | ○ |
| 3rd auxiliary circuit for hydraulic powertilt and 4th line for hydraulic quick-coupler single effect (PC20R-5) | ○ |
| Lehnhoff Powertilt (PC20R-5) | ○ |
| Lehnhoff quick-couplers | ○ |

Undercarriage

| | |
|---------------------|---|
| 230 mm rubber shoes | ● |
| 230 mm steel shoes | ○ |

Cabin

| | |
|--|---|
| ROPS (ISO 3471) / OPG (ISO 10262) level 1 cab with heating, skylight, pull-up type front window with locking device, lower window, front window wiper with intermittent feature, floor mat | ● |
| Adjustable suspension seat with seat belt | ● |
| 12 Volt power supply | ● |
| Beverage holder | ● |
| Radio | ○ |
| Adjustable deluxe suspension seat with retractable seat belt (Grammer) | ○ |

Service and maintenance

| | |
|---|---|
| Automatic fuel line de-aeration | ● |
| Double element type air cleaner with dust indicator and auto dust evacuator | ● |
| Toolkit | ● |
| Komtrax – Komatsu wireless monitoring system (4G) | ○ |

Safety equipment

| | |
|--|---|
| Electric horn | ● |
| Audible travel alarm | ● |
| Lifting cylinder guard | ● |
| Rear-view mirrors | ● |
| Battery main switch | ● |
| ROPS (ISO 12117) - OPG (ISO 10262) level 1 | ● |
| Secondary engine shutdown switch | ● |
| Seat belt caution indicator | ● |
| Dual lock system for PPC controls | ● |
| Rotating beacon | ○ |

Lighting system

| | |
|--|---|
| Working light on boom, 2 front working lights on cab | ● |
| LED lighting system: Working light on boom, 2 front working lights on cab, rear working light on cab | ○ |

Work equipment

| | |
|-------------------------------|---|
| Blade | ● |
| 880 mm arm (PC17R-5) | ● |
| 965 mm arm (PC20R-5) | ● |
| 1130 mm arm (PC17R-5) | ○ |
| 1215 mm arm (PC20R-5) | ○ |
| Bucket range (250 - 450 mm) | ○ |
| 1000 mm ditch cleaning bucket | ○ |

Other equipment

| | |
|--|---|
| Standard counterweight | ● |
| Change-over valve on bucket cylinder for clamshell bucket utilization (PC20MR-5) | ○ |
| Biodegradable oil for hydraulic system | ○ |
| Customised paint | ○ |
| Tie down points (rear) | ○ |

Further equipment on request

- standard equipment
- optional equipment



A wide range of buckets and attachments is available. Your Komatsu distributor is ready to assist you with the selection of suitable options.

This specification sheet may contain attachments and optional equipment that are not available in your area. Please consult your local Komatsu distributor for those items you may require.

Materials and specifications are subject to change without notice.

Your Komatsu partner:

KOMATSU

[komatsu.eu](https://www.komatsu.eu)

